

SOLO

ALL-IN-ONE LED DOWNLIGHT 10W

NEW & IMPROVED DESIGN

- ✓ **EASIER COLOUR CHANGE**
Switch is behind removable fascia
- ✓ **EASIER TO INSTALL**
Fits in 90mm void height
Driver on flexible connection

WINNING ORIGINAL FEATURES

- ✓ **SAME BRIGHT OUTPUT**
- ✓ **SAME 5-YEAR WARRANTY**
- ✓ **SAME APPEARANCE**
Can be installed alongside original version

3 COLOURS



3000K WARM WHITE

Recommended for home, hospitality.



4000K COOL WHITE

Recommended for lobby, corridor, washroom.



6000K DAYLIGHT WHITE


Recommended for office, workshop.

3 FASCIAS

STEEL

CHROME

WHITE

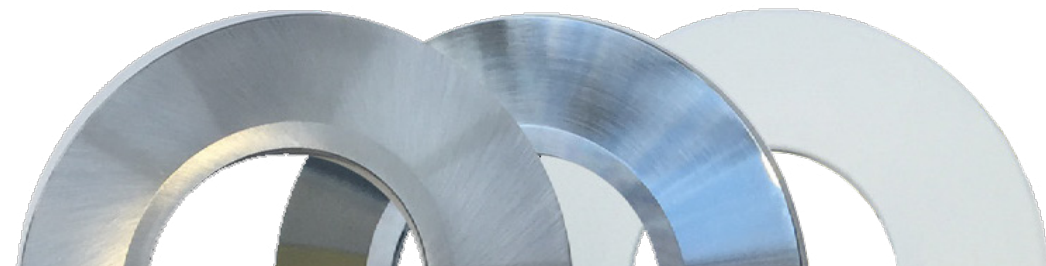

1 DOWNLIGHT

- ✓ **DIMMABLE**
- ✓ **FIRE RESISTANT 90 MINUTES**
- ✓ **WATER RESISTANT IP65 Fascia**
- ✓ **3-HOUR EMERGENCY VERSION AVAILABLE**


YOUR VERSATILE LIGHTING SOLUTION

SOLO


SPECIFICATION

Item	833570
Quantity	1
Light Colour	3,000K (WW) / 4,000K (CW) / 6,000K (DL)
Ra, Consistency	Ra80, 6 SDCM
Luminous flux	615lm (WW) / 740lm (CW) / 649lm (DL)
Beam Angle, Light Intensity	40°, 2185 cd
Accent Lighting	Yes
Warm Up Time	Instant
Dimmable	Yes (Max.20 fittings)
Size	55mm x 85mm x 85mm (Excluding driver)
Power Input	10W at 230VAC 50-60Hz
Power Factor & Current	0.9, 285mA
Lamp Type	COB
Fire Resistance	BS476-22 90 minutes
Working Temperature	-30°C, +35°C
Construction	Aluminium heat sink, steel fascia
IP Rating	IP65 Fascia only
Energy Efficiency Index	A+
Energy Consumption	10 kWh / 1000 h
Lifetime	50,000 h
Building Regs - Part L	Yes
Warranty & LMF at EoL	5 years
Switching Cycles	100,000


INSTALLATION INSTRUCTIONS

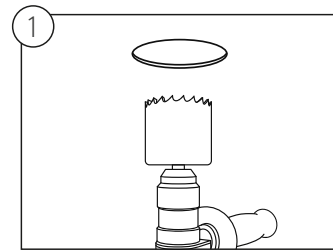


Mark the desired position and carefully cut out. Space requirements on base of carton.

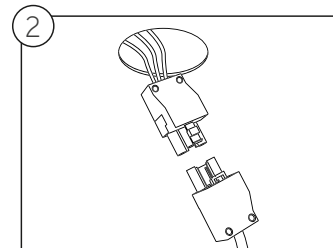



Connect wires using the plug and play connectors.

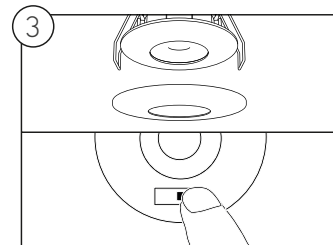

Unscrew bezel; move switch to select light colour: warm white, cool white, daylight.

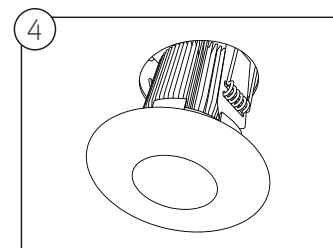

...Optionally affix a different magnetic bezel from the assortment in the carton.

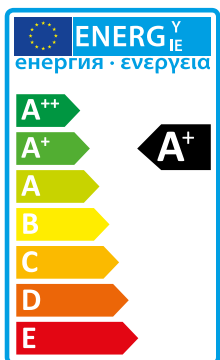

SPACE REQUIREMENT

